




Adaptor plug/jack
BNC plug (male) / N jack (female)

AD-B1N27A/144-94

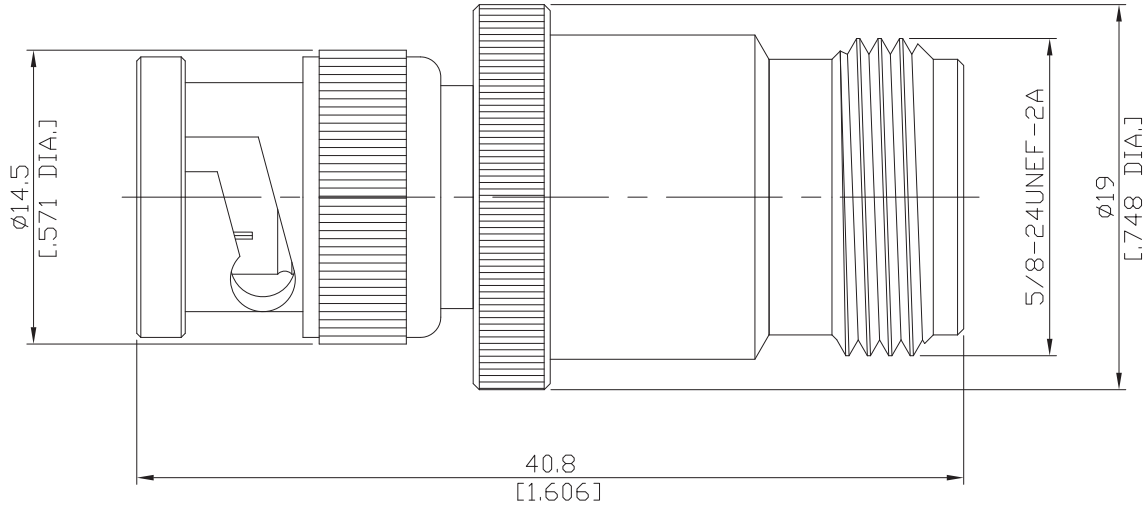

All dimensions are in mm [inch]

Interface

According to MIL-C-39012;MIL-STD-348A/301
MIL-C-39012;MIL-STD-348A/304

Electrical Data

Impedance 75 Ω
Frequency DC to 1 GHz

Mechanical Data

Coupling mechanisms BNC (Bayonet-lock) ; N (Screw-lock)
Weight 0.0392 kg

Environmental Data

Temperature range -65°C to +165°C
RoHS compliant

Material And Plating

Piece Parts (BNC)	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy
Piece Parts (N)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

Packing

Single or 100