




Adaptor jack/jack
BNC jack (female) / UHF jack (female)

AD-B2U25A/H4-H4

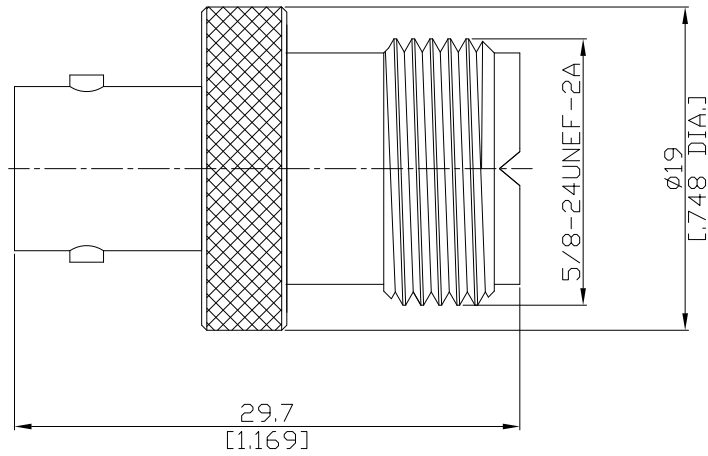

All dimensions are in mm [inch]
Tolerances according to DIN ISO 2768-mH

Interface

BNC side according to IEC 60169-8; MIL-STD-348A/301
UHF side according to IEC 60169-12

Electrical Data

Impedance BNC (50 Ω); UHF (non-constant)
Frequency DC to 300 MHz

Mechanical Data

Coupling mechanisms BNC (Bayonet-lock); UHF (Screw-lock)
Weight 0.0157 kg

Environmental Data

Temperature range -55°C to +149°C
RoHS compliant

Material And Plating

Piece Parts (BNC)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

Piece Parts (UHF)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	

Packing

Single or 100