


Adaptor jack/jack  
C jack (female) / C jack (female)

AD-C2C25A/H3-H3

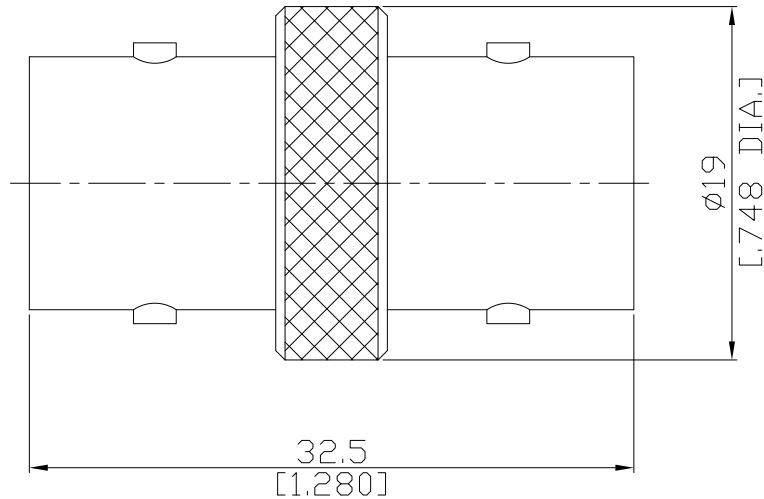

All dimensions are in mm [inch]  
Tolerances according to DIN ISO 2768-mH

#### Interface

According to MIL-C-39012;MIL-STD-348A/302

#### Electrical Data

Impedance 50 Ω  
Frequency DC to 4 GHz

#### Mechanical Data

Coupling mechanisms Two-stud bayonet  
Weight 0.0262 kg

#### Environmental Data

Temperature range -65°C to +165°C  
RoHS compliant

#### Material And Plating

Piece Parts (C)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	

Piece Parts (C)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	

#### Packing

Single or 100