


Adaptor Plug / Plug
HN plug (male) / HN plug (male)

AD-HN1HN25A/033-033

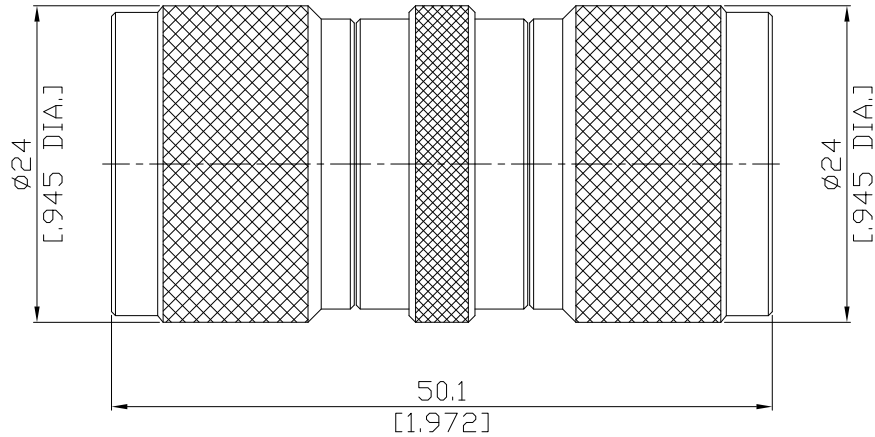

All dimensions are in mm [inch]
Tolerances according to DIN ISO 2768-mH

Interface

According to MIL-C-3643;MIL-STD-348A/317

Electrical Data

Impedance 50 Ω
DC to 4 GHz

Mechanical Data

Coupling mechanisms Screw-lock
0.1125 kg

Environmental Data

Temperature range -65°C to +165°C
compliant

Material And Plating

| Piece Parts (HN) | Material | Plating |
|------------------|-----------------|---------|
| Centre contact | Brass | Silver |
| Body | Brass | Nickel |
| Insulator | PTFE | |
| Gasket | Silicone Rubber | |
| Coupling nut | Brass | Nickel |

| Piece Parts (HN) | Material | Plating |
|------------------|-----------------|---------|
| Centre contact | Brass | Silver |
| Body | Brass | Nickel |
| Insulator | PTFE | |
| Gasket | Silicone Rubber | |
| Coupling nut | Brass | Nickel |

Packing

Single or 100