


Adaptor plug/plug  
2.92mm plug (male) / 3.5mm plug (male)

AD-K1PC15A/9XX-9XX

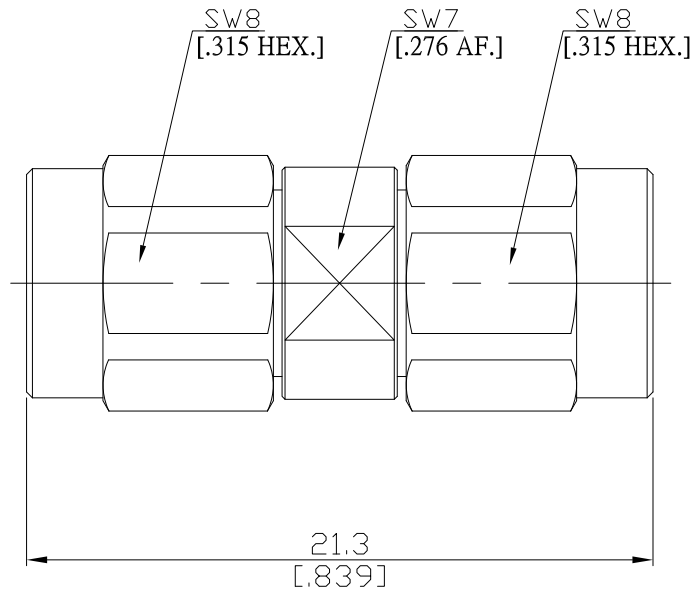

All dimensions are in mm [inch]  
Tolerances according to DIN ISO 2768-mH

**Interface**

2.92mm according to IEC 61169-35  
3.5mm according to IEC 60169-23

**Electrical Data**

Impedance 50 Ω  
Frequency DC to 34.5 GHz  
VSWR (Return Loss) ≤ 1.15 (≥ 23.13 dB)  
Insertion Loss ≤ 0.05 x √F (GHz) dB

**Mechanical Data**

Coupling mechanisms Screw-lock  
Weight 0.0028 kg

**Environmental Data**

Temperature range -55°C to +125°C  
RoHS compliant

**Material And Plating**

Piece Parts (2.92mm)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PS	
Coupling nut	Stainless Steel	Passivated

Piece Parts (3.5mm)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PS	
Coupling nut	Stainless Steel	Passivated

**Packing**

Single or 100