


Adaptor jack/jack
N jack (female) / BNC jack (female)

AD-N2B25A/H3-H3

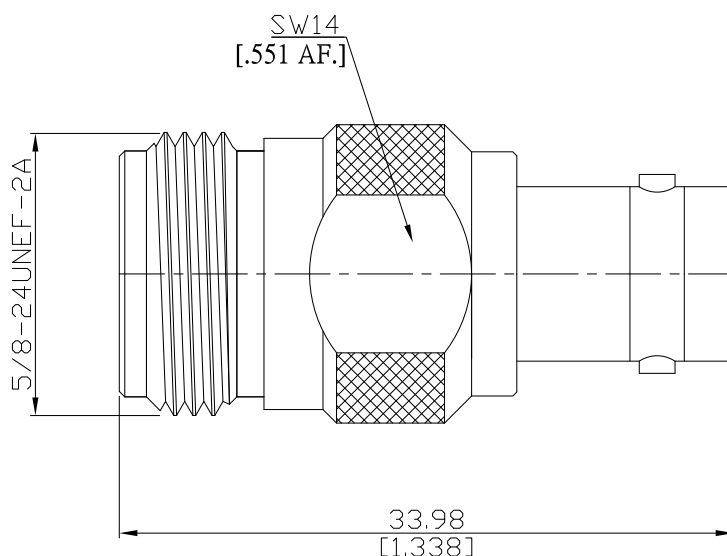

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

N side according to

IEC 61169-16; MIL-C-39012; MIL-STD-348A/304

BNC side according to

IEC 60169-8; MIL-C-39012; MIL-STD-348A/301

Electrical Data

Impedance

50 Ω

Frequency

DC to 4 GHz

VSWR (Return Loss)

≤ 1.20 (≥ 20.83 dB)

Insertion Loss

≤ 0.05 x √F [GHz] dB

Mechanical Data

Coupling mechanisms

N (Screw-lock); BNC (Bayonet-lock)

Weight

0.0318 kg

Environmental Data

Temperature range

-65°C to +165°C

RoHS

compliant

Material And Plating

Piece Parts (N)

Piece Parts (N)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	

Piece Parts (BNC)

Piece Parts (BNC)	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	

Packing

Single or 100