


Bulkhead Adaptor Jack/Jack
RPC3.5 jack (female) / RPC3.5 jack (female)

AD-PC2PC25A-BH/9X-9X

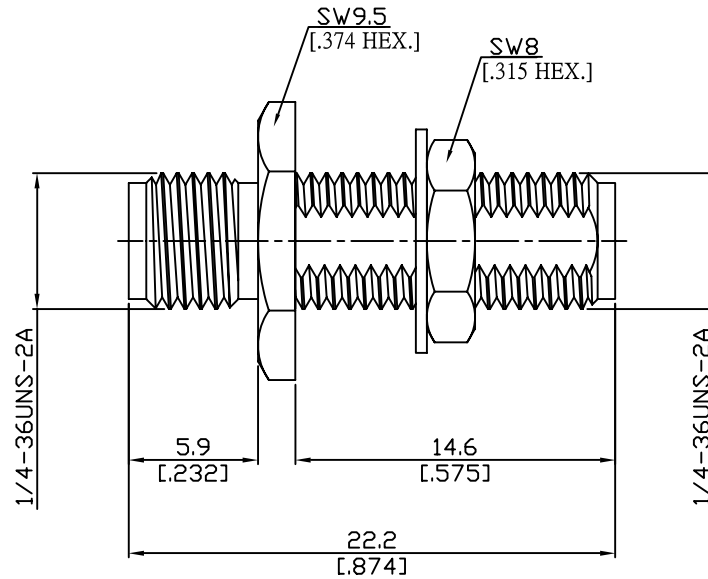

All dimensions are in mm [inch]
Tolerances according to DIN ISO 2768-mH

Interface
According to IEC 60169-23

Electrical Data
Impedance 50 Ω
Frequency DC to 26.5 GHz
VSWR (Return Loss) ≤ 1.20 (≥ 20.8 dB)
Insertion Loss ≤ 0.05 x √F (GHz) dB

Mechanical Data
Coupling mechanisms Screw-lock
Weight 0.0042 kg

Environmental Data
Temperature range -55°C to +125°C
RoHS compliant

Material And Plating

Piece Parts (PC3.5)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PS	
Gasket	Silicone Rubber	
Fastening nut	Stainless Steel	Passivated
Washer	Stainless Steel	Passivated
Piece Parts (PC3.5)	Material	Plating
Centre contact	Beryllium Copper	Gold plating (Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PS	

Packing
Single or 100

Related Document
Mounting Dimension MD95