


Bulkhead adaptor jack/jack  
SC jack (female) / SC jack (female)

## AD-SC2SC25A-BH/9X-9X

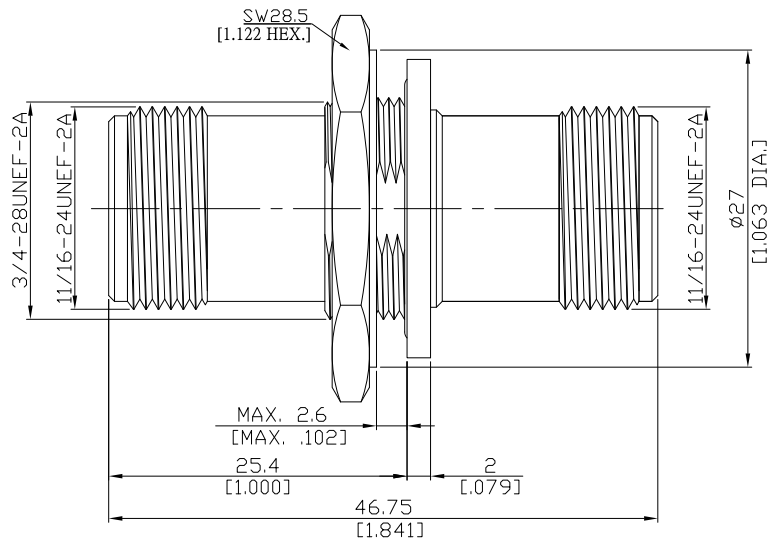

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

### Interface

According to MIL-C-39012; MIL-STD-348A/309

### Electrical Data

Impedance 50 Ω  
Frequency DC to 11 GHz  
VSWR (Return loss) ≤ 1.25 (≥ 19.08 dB)

### Mechanical Data

Coupling mechanisms Screw-lock  
Weight N/A

### Environmental Data

Temperature range -65°C to +165°C  
RoHS compliant

### Material And Plating

Piece Parts (SC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	
Gasket	Silicone Rubber	
Fastening nut	Stainless Steel	Copper-Tin-Zinc Alloy
Washer	Stainless Steel	Copper-Tin-Zinc Alloy
Piece Parts (SC)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	

### Packing

Single or 100

### Related Document

Mounting Dimension MD2

The facts and figures herein are carefully compiled to the best of our knowledge, but they are intended for general informational purposes only. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Rev.: Rosnol RF/Microwave Technology  
[www.rosnol.com](http://www.rosnol.com); [info@rosnol.com](mailto:info@rosnol.com)  
Date: 19/11/10 Phone: +886-3-463-5095 / Fax: +886-3-463-5952  
N-CAGE Code: SFKK0

Page

1/1