


2.92mm Straight Panel Receptacle Jack
Coaxial End

K2GFA50-2000A/9X

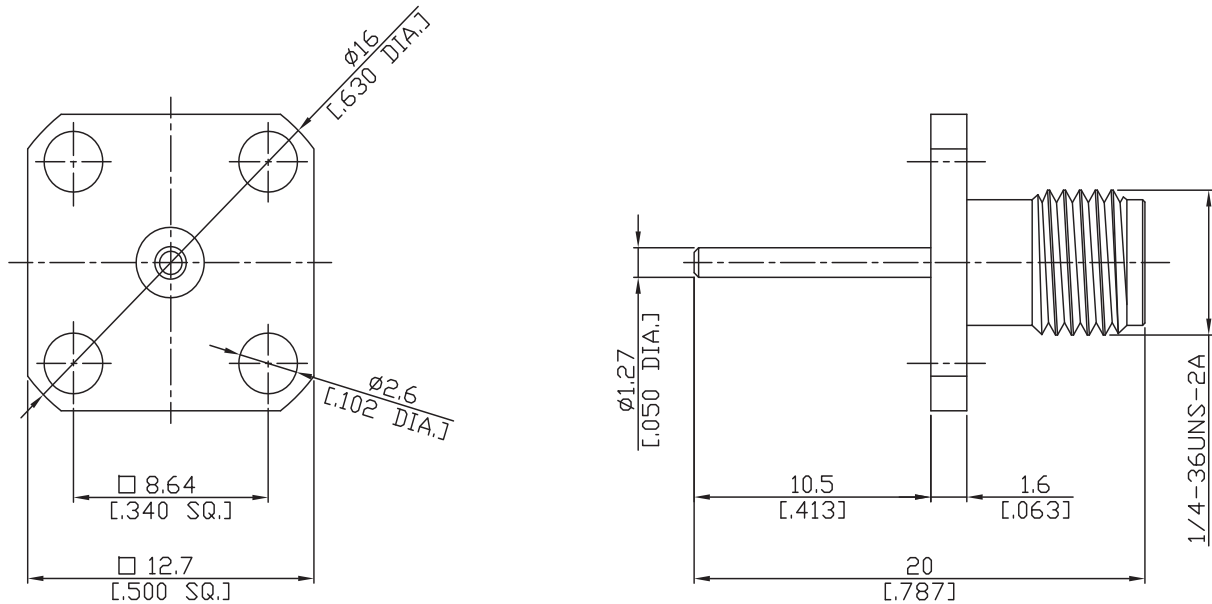

All dimensions are in mm [inch]

Interface

According to MIL-C-39012;MIL-STD-348A/323

Electrical Data

Impedance 50 Ω
Frequency DC to 40 GHz

Mechanical Data

Coupling mechanisms Screw-lock
Weight 0.0026 kg

Environmental Data

Temperature range -55°C to +125°C
RoHS compliant

Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PPO/PPE	

Packing

Single or 100