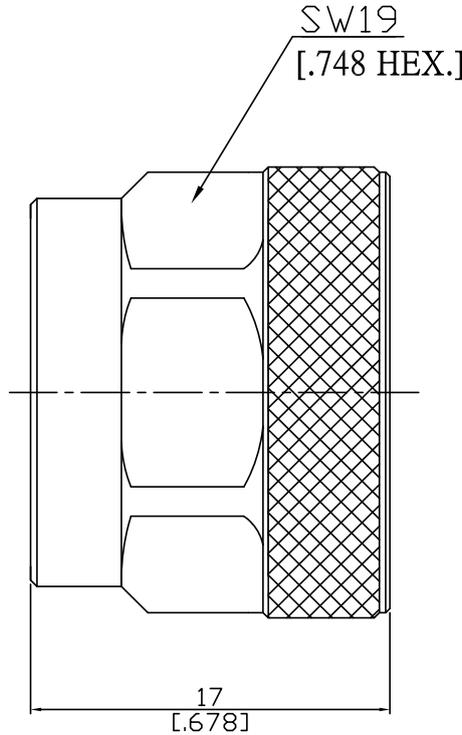


N SHORT
Nplug (male)
N1AS50-1700A/133


All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to MIL-C-39012;MIL-STD-348A/310

Electrical Data

 Impedance 50 Ω
 Frequency DC to 12.4 GHz

Mechanical Data

 Coupling mechanisms Screw-lock
 Weight N/A

Environmental Data

 Temperature range -65°C to +165°C
 RoHS compliant

Material And Plating

Piece Parts (SMA)	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Nickel
Gasket	Silicone Rubber	
Coupling nut	Brass	Nickel

Packing

Single or 100