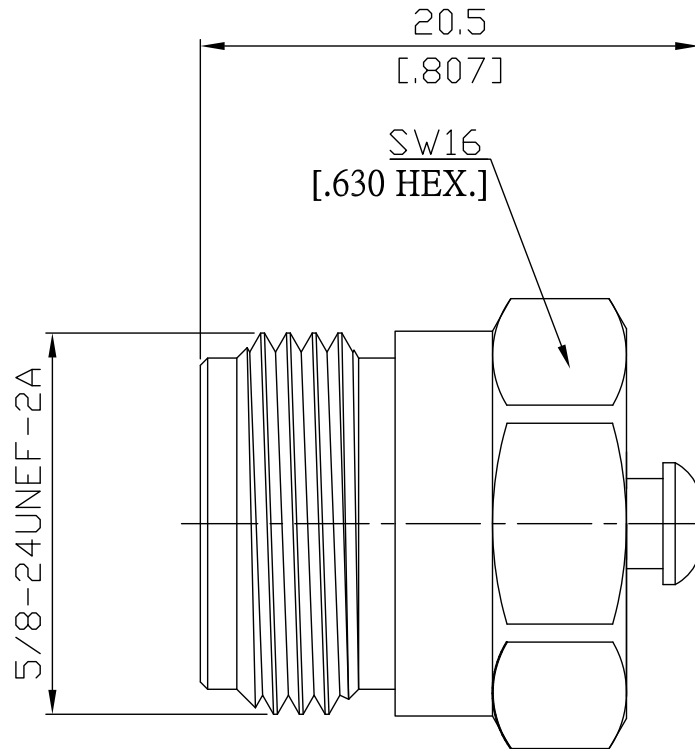


**N Straight Protective Cap Jack**
**N2A00-2050A/-3**


All dimensions are in mm [inch]  
Tolerances according to DIN ISO 2768-mH

**Mechanical Data**

Coupling mechanisms Screw-lock  
Weight N/A

**Environmental Data**

Temperature range -65°C to +165°C  
RoHS compliant

**Material And Plating**

Connector parts	Material	Plating
Body	Brass	Nickel

**Packing**

Single or 100