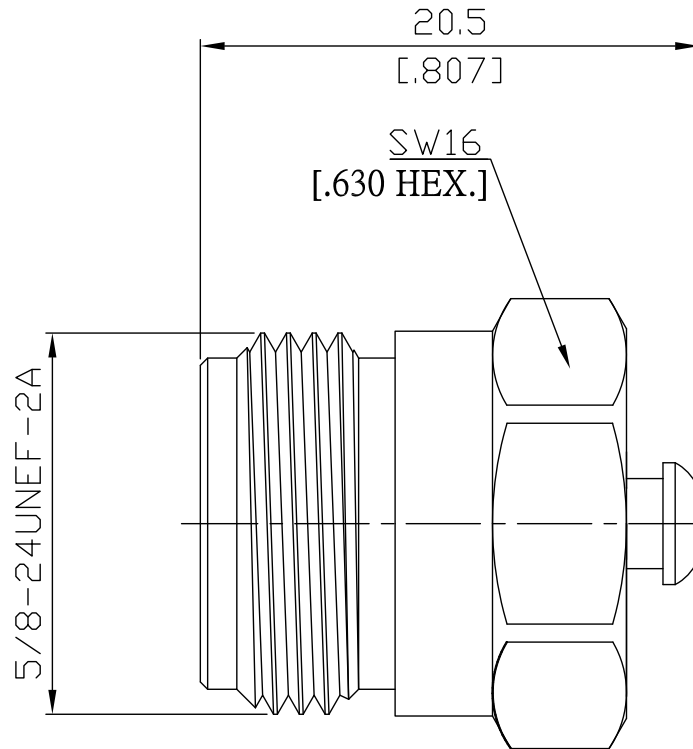


**N Straight Protective Cap Jack**
**N2A00-2050A/-4**


All dimensions are in mm [inch]  
Tolerances according to DIN ISO 2768-mH

**Mechanical Data**

Coupling mechanisms                      Screw-lock  
Weight    N/A

**Environmental Data**

Temperature range                              -65°C to +165°C  
RoHS    compliant

**Material And Plating**

Connector parts	Material	Plating
Body	Brass	Copper-Tin-Zinc Alloy

**Packing**

Single or 100