


## 2.4mm Plug traight PCB End Launch

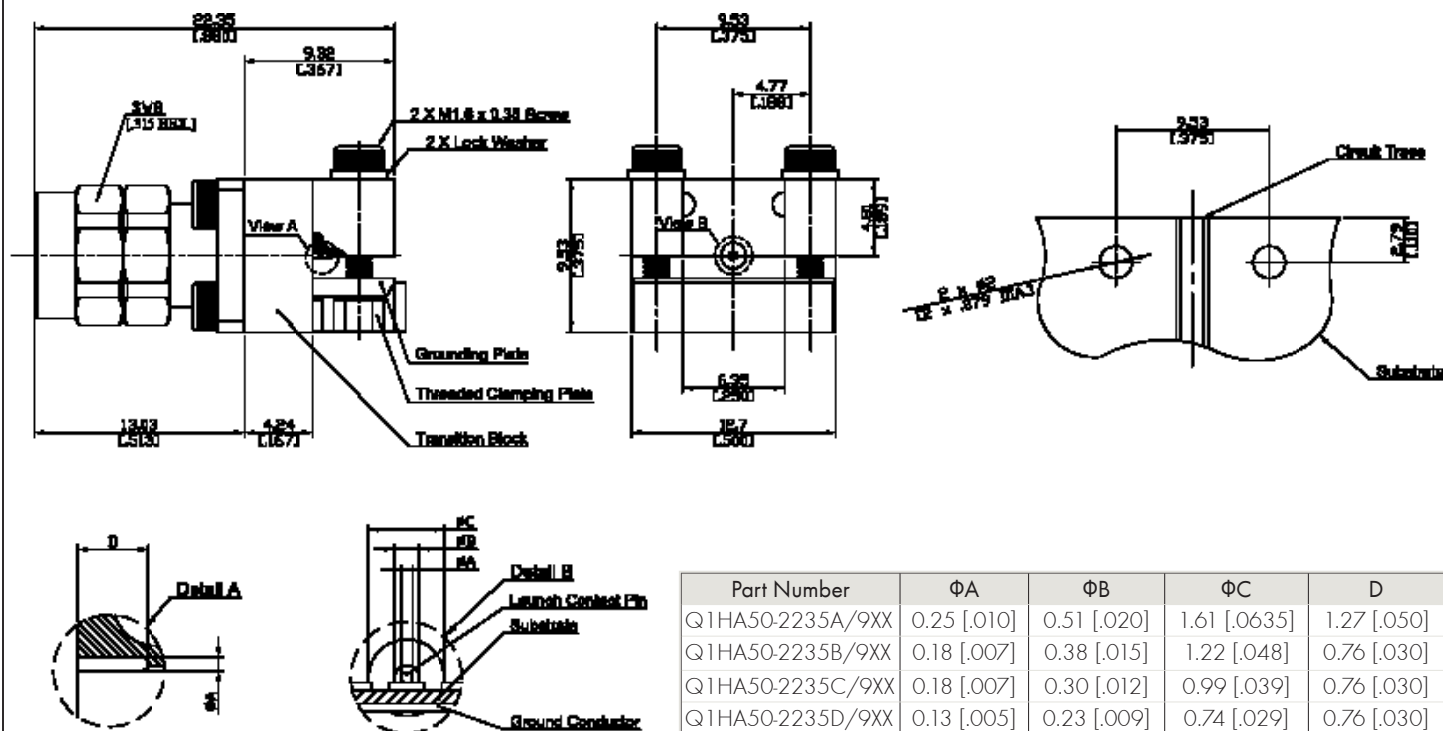

All dimensions are in mm [inch]

### Interface

According to

IEEE Std 287-2007

### Electrical Data

Impedance

50  $\Omega$

Frequency

DC to 50 GHz

### Mechanical Data

Board mounting type

End Launch

### Environmental Data

Temperature range

-55°C to +80°C

RoHS

compliant

### Material And Plating

Connector parts (RPC2.4 Connector)	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PS	
Coupling Nut	Stainless Steel	Passivated
Connector parts (Transition Block)	Material	Plating
Launch Pin	Beryllium Copper	Gold plating(Nickel underplated)
Transition Block	Brass	Copper-Tin-Zinc Alloy
Transition Block Insulator	PTFE	

### Packing

Single

### Related Document

Mounting Dimension

MD 108