


2.4mm Straight Panel Receptacle Jack  
Coaxial End

Q2GFA50-1370B/9X

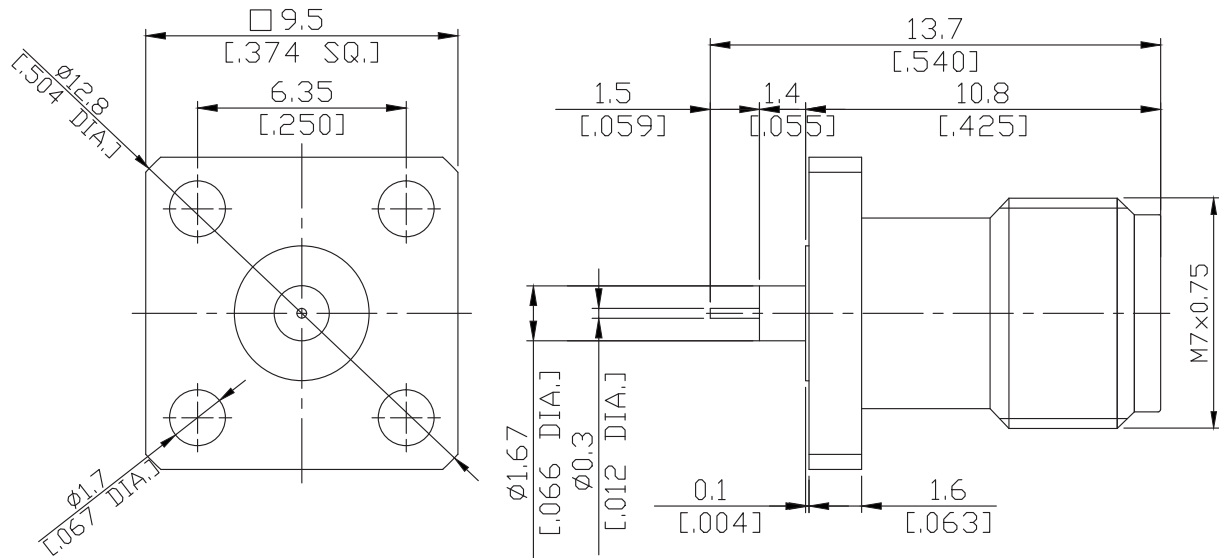

All dimensions are in mm [inch]

**Interface**

According to IEEE STD 287-2007

**Electrical Data**

Impedance 50 Ω  
Frequency DC to 50 GHz  
VSWR ≤1.15  
Return loss ≥23.127dB

**Mechanical Data**

Coupling mechanisms Screw-lock  
Weight N/A

**Environmental Data**

Temperature range -55°C to +165°C  
RoHS compliant

**Material And Plating**

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PEI/PTFE	

**Packing**

Single or 100