




SMA Jack (Female) Short with Chain

SMA2AS50-1270A-88.9/9Q

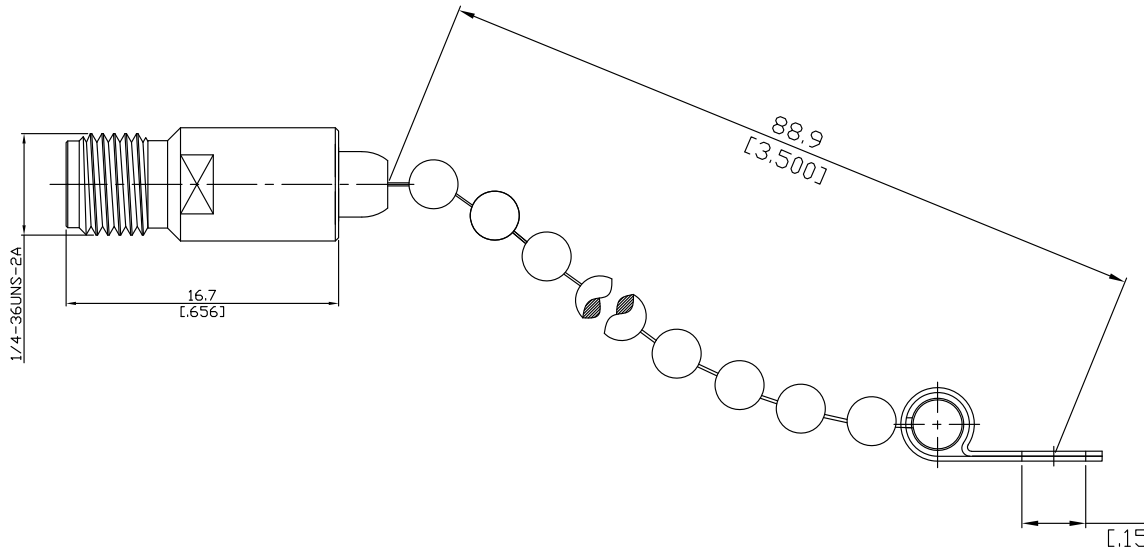

All dimensions are in mm [inch]  
Tolerances according to DIN ISO 2768-mH

**Interface**

According to MIL-STD-348A/310  
IEC 60169-15

**Electrical Data**

Impedance 50 Ω  
Frequency DC to 18 GHz  
Reflection 100% Nominal

**Mechanical Data**

Coupling mechanisms Screw-lock  
Weight N/A

**Environmental Data**

Temperature range -65°C to +165°C  
RoHS compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Gold plating(Nickel underplated)
Gasket	Silicone Rubber	
Chain	Stainless Steel	Passivated

**Packing**

Single or 100