


## SMA Right Angle Panel Receptacle Jack (Coaxial End)

## SMA2GFA59-2340A/9X

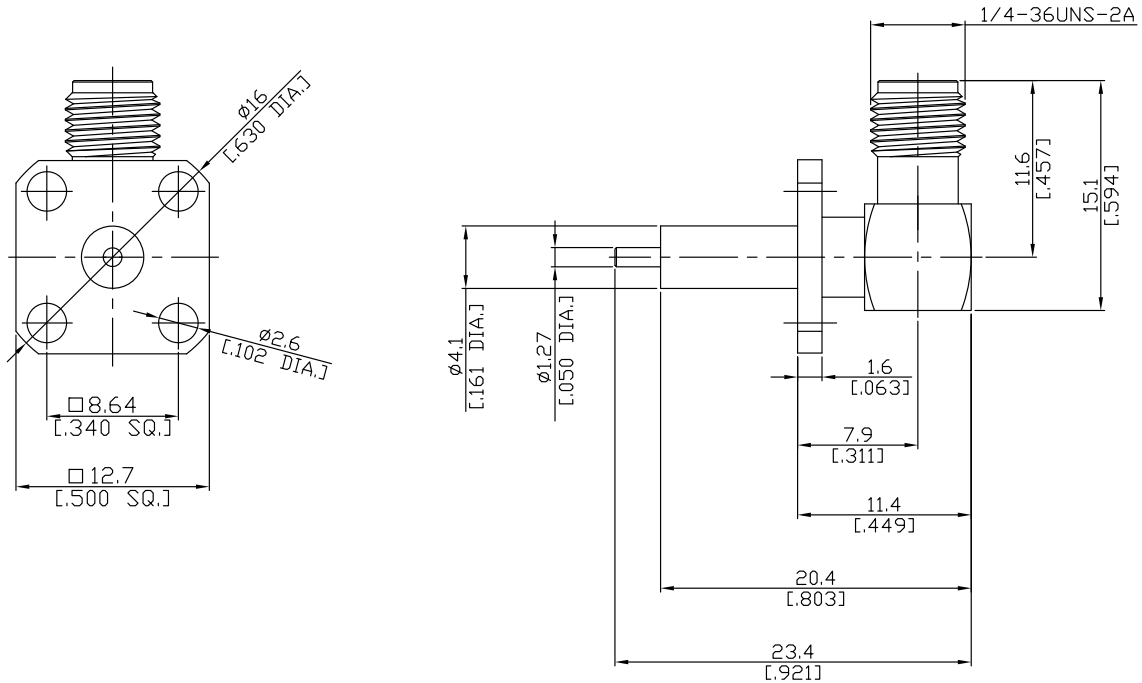

All dimensions are in mm [inch]  
Tolerances according to DIN ISO 2768-mH

### Interface

According to MIL-C-39012;MIL-STD-348A/310

### Electrical Data

Impedance 50  $\Omega$   
Frequency DC to 12.4 GHz

### Mechanical Data

Coupling mechanisms Screw-lock  
Weight 0.0052 kg

### Environmental Data

Temperature range -65°C to +165°C  
RoHS compliant

### Material And Plating

Piece Parts	Material	Plating
Centre contact	Beryllium Copper	Gold plating(Nickel underplated)
Body	Stainless Steel	Passivated
Insulator	PTFE	

### Packing

Single or 100

### Related Document

Mounting Dimension MD71