


SMA Right Angle Panel Receptacle Jack (Coaxial End)

SMA2GFA59-2930A/9X

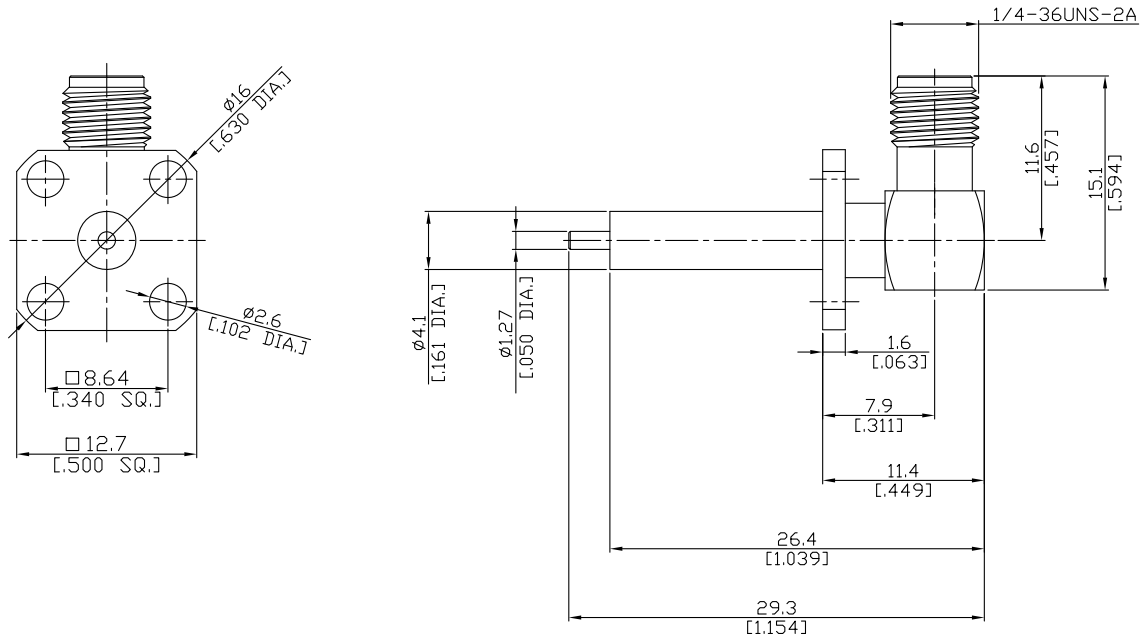

All dimensions are in mm [inch]
Tolerances according to DIN ISO 2768-mH

Interface
According to MIL-C-39012;MIL-STD-348A/310

Electrical Data
Impedance 50 Ω
Frequency DC to 18 GHz

Mechanical Data
Coupling mechanisms Screw-lock
Weight 0.0052 kg

Environmental Data
Temperature range -65°C to +165°C
RoHS compliant

Material And Plating

| Piece Parts | Material | Plating |
|----------------|------------------|----------------------------------|
| Centre contact | Beryllium Copper | Gold plating(Nickel underplated) |
| Body | Stainless Steel | Passivated |
| Insulator | PTFE | |

Packing
Single or 100

Related Document
Mounting Dimension MD71