


**BNC (Male) Terminations Plug**

**T-B15-4G5WA/133**

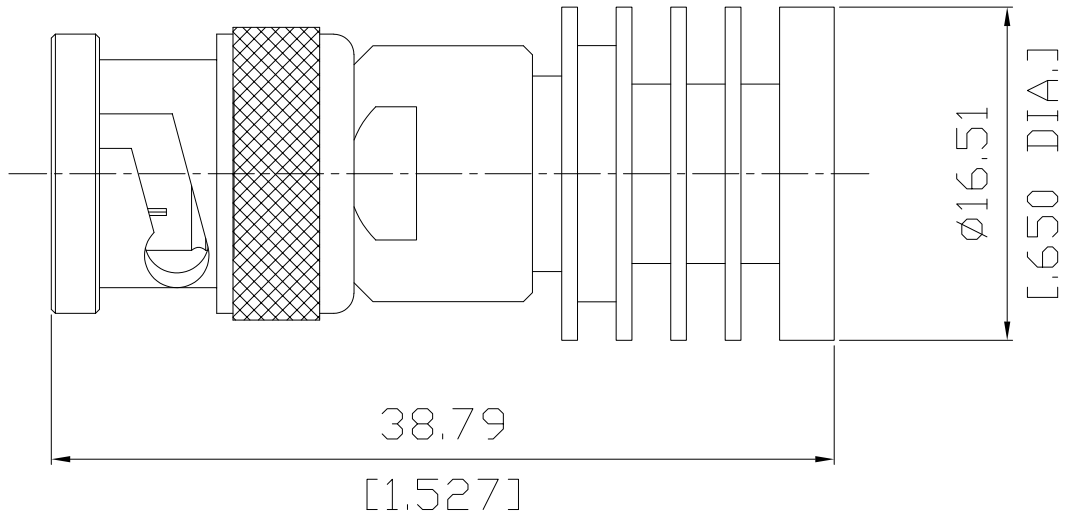

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

**Interface**

According to IEC 60169-8; MIL-STD-348A/301

**Natural Convection Cooling Designed**

According to MIL-DTL-39030

**Electrical Data**

Impedance 50 Ω  
 Interface frequency max. DC to 4 GHz  
 VSWR (Return Loss) ≤ 1.25 (≥ 19.08 dB)  
 Average power at 25°C 5 W

**Mechanical Data**

Coupling mechanisms Bayonet-lock  
 Weight N/A

**Environmental Data**

Temperature range -65°C to +125°C  
 RoHS compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	
Heat sink	Aluminum	Anodized
Gasket	Silicone Rubber	
Coupling nut	Brass	Nickel

**Packing**

Single or 100