


BNC Terminations Plug

T-B15-8G2WA/133

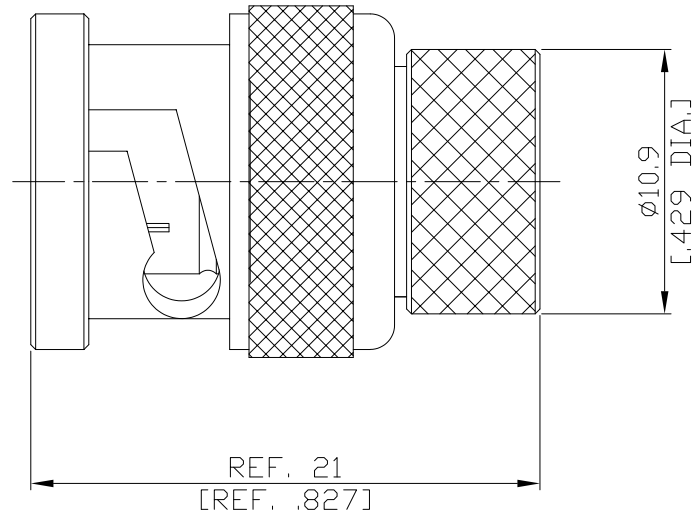

All dimensions are in mm [inch]
Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 60169-8; MIL-STD-348A/301

Electrical Data

Impedance 50 Ω
Interface frequency max. DC to 8 GHz
VSWR (Return Loss) ≤ 1.20 (≥ 20.83 dB)
Average power at 25°C 2 W

Mechanical Data

Coupling mechanisms Bayonetlock
Weight N/A

Environmental Data

Temperature range -55°C to +125°C
RoHS compliant

Material And Plating

| Connector parts | Material | Plating |
|-----------------|-----------------|----------------------------------|
| Centre contact | Brass | Gold plating(Nickel underplated) |
| Body | Brass | Nickel |
| Insulator | PTFE | |
| Gasket | Silicone Rubber | |
| Coupling nut | Brass | Nickel |

Packing

Single or 100