


BNC Terminations Jack

T-B25-4G2WA/H3

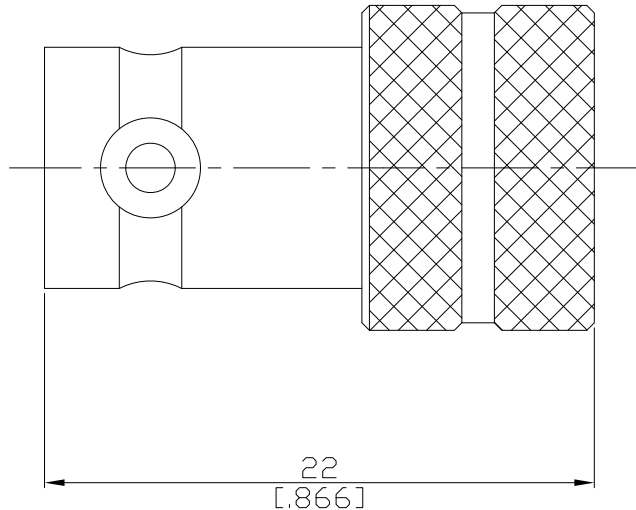

All dimensions are in mm [inch]  
Tolerances according to DIN ISO 2768-mH

**Interface**

According to IEC 60169-8; MIL-C-39012; MIL-STD-348A/301

**Electrical Data**

Impedance 50 Ω  
Interface frequency max. DC to 4 GHz  
VSWR (Return Loss) ≤ 1.20 (≥ 20.83 dB)  
Average power at 25°C 2 W

**Mechanical Data**

Coupling mechanisms Bayonet-lock  
Weight N/A

**Environmental Data**

Temperature range -55°C to +125°C  
RoHS compliant

**Material And Plating**

Connector parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	

**Packing**

Single or 100