




N Terminations Plug 25 Watt

T-N15-10G25WA/144

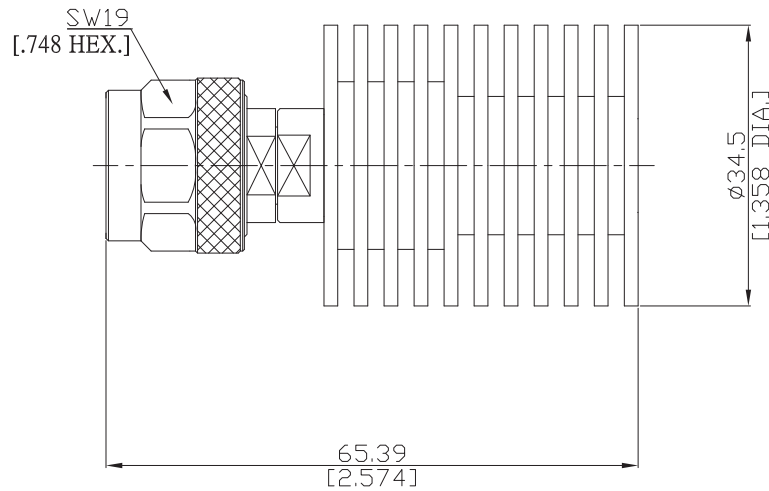

All dimensions are in mm [inch]  
Tolerances according to DIN ISO 2768-mH

**Interface**

According to IEC 60169-16; MIL-C-39012; MIL-STD-348A/304

**Natural Convection Cooling Designed**

According to MIL-DTL-39030

**Electrical Data**

Impedance 50 Ω  
Frequency DC to 10 GHz  
VSWR (Return Loss) ≤ 1.25 (≥ 19.1 dB)  
Power rating (Watt) 25 W at 25°C

**Mechanical Data**

Coupling mechanisms Screw-lock  
Weight N/A

**Environmental Data**

Temperature range -55°C to +125°C  
RoHS compliant

**Material And Plating**

Piece Parts	Material	Plating
Centre contact	Brass	Gold plating(Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Heatsinks	Aluminum	Black anodized

**Packing**

Single