




TNC (Male) Terminations Plug

T-T15-11G2WA/144

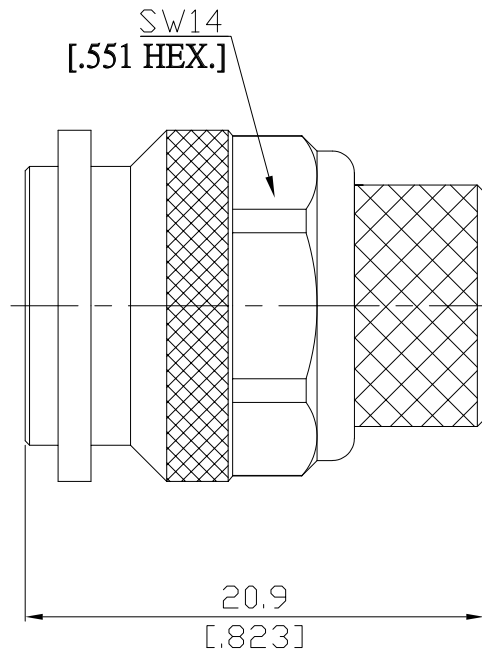

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface

According to IEC 60169-8; MIL-STD-348B/301

Electrical Data

Impedance 50 Ω
 Interface frequency max. DC to 11 GHz
 VSWR (Return Loss) ≤ 1.25 (≥ 19.08 dB)
 Power rating (Watt) 2 W @ 25 °C, sea level

Mechanical Data

Coupling mechanisms Screw-lock
 Weight N/A

Environmental Data

Temperature range -55 °C to +125 °C
 RoHS compliant

Material And Plating

Connector parts	Material	Plating
Centre contact	Brass	Gold plating (Nickel underplated)
Body	Brass	Copper-Tin-Zinc Alloy
Insulator	PTFE	
Gasket	Silicone Rubber	
Coupling nut	Brass	Copper-Tin-Zinc Alloy

Packing

Single or 100