


# Technical Data Sheet

# BNC Straight Bulkhead Receptacle Jack Solder End

# BNC2FB50-2670B/H3

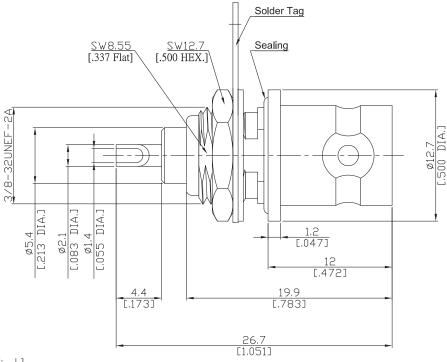

All dimensions are in mm [inch]

Tolerances according to DIN ISO 2768-mH

Interface According to

MIL-C-39012; MIL-STD-348A/301

## Electrical Data

Impedance Frequency

Weight

50 Ω

DC to 4 GHz

### Mechanical Data

Coupling mechanisms

Bayonet-lock

0.0073 kg

# Environmental Data

Temperature range RoHS

-65°C to +165°C

compliant

# Material And Plating

Piece Parts	Material	Plating
Centre contact	Phosphor Bronze	Gold plating(Nickel underplated)
Body	Brass	Nickel
Insulator	PTFE	
Gasket	Silicone Rubber	
Solder tag	Brass	Nickel
Fastening nut	Brass	Nickel
Washer	Brass	Nickel

## Packing

Single or 100

## Related Document

Mounting Dimension

MD18

The facts and figures herein are carefully compiled to the best of our	
knowledge, but they are intended for general informational purposes only	
In the effort to improve our products, we reserve the right to make changes	
judged to be necessary.	

	Rosnol RF/Microwave Technology www.rosnol.com ; info@rosnol.com
ate:	Phone:+886-3-463-5095
7/11/10	Fav:+886 3 463 5052